


Time Control Equipment

Rauland

MODEL: SPS24 – 24VOLT DC POWER SUPPLY

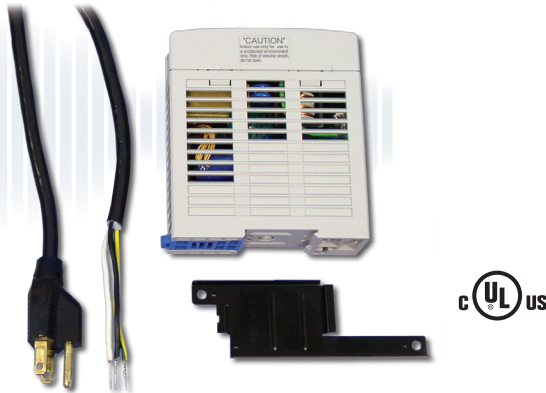

SPS24 – 24Volt DC Power Supply

FEATURES

- Solid state reliability
- Overcurrent protection
- Overvoltage protection
- 24 VDC @ 2.5 Amps
- Convenient screw type terminals
- Mounting bracket included
- UL and CSA listed

SPECIFICATIONS

Output Voltage: 24 VDC
Overvoltage Protection: 120% min. shut down
Output Current: 2.5 Amps DC
Terminations: M3.5 slotted Phillips-head screws
Power Requirement: 85 to 264 VAC
Overcurrent Protection: 105% or more, auto reset
Power Consumption: 60 Watts
AC Input: 3-conductor line cord (included)

Dimensions:

H: 3.74" (95 mm)
W: 1.42" (36 mm)
D: 4.25" (108 mm)

Weight: 0.6 lbs

Voltage Adjustment: $\pm 10\%$ (V.Adj. control on front)

Ripple Voltage: 2% p-p max. including noise

DESCRIPTION

The SPS24 is a 24 Volt DC Power Supply with a 2.5 Amp current rating. The SPS24 provides low ripple 24 VDC for secondary clock applications. The power supply has both overvoltage and overcurrent protection.

The SPS24 can be used in any application that requires a 24 VDC power supply. The SPS24 Power Supply comes with an easy to install mounting bracket as well as a three (3) conductor AC cord for quick

installation. In addition, the SPS24 may be mounted on 35mm DIN Rail. All terminations are Phillips screw-type with no special connectors required.

The SPS24 carries UL508, UL1604, CSA as well as UL1310 Class 2 listings

ASSOCIATED EQUIPMENT

TCAMCS – Telecenter Atomic Clock Sync. Module
TCCKAN12 – 12" Analog Clock
TCCKAN16 – 16" Analog Clock
TCCKINFM – Clock Interface Module
PS12 – 12 VDC Power Supply
Telecenter Communications Systems with Secondary Clocks



Rauland is a Division of AMETEK, Inc.

USA +1 800 752 7725
Asia Pacific +65 64835750

www.rauland.com

Mid East & Africa +20 122 2154016
Europe +30 693 7501168
Latin America +1 847 454 4203

*Architect and Engineer (A&E) Specifications
available online at customerconnection.rauland.com
Specifications subject to change without notice.*